




317 330 + 317 342

L1361/1

Pattern 3 terminal,
panel sealed

**Qualification approved for
Service's use and Panel sealed.
Specification: DEF-5335**

This terminal has a 4 mm socket in the head and a large clamping gap with unique pyramid shaped teeth for piercing the wire insulant. This

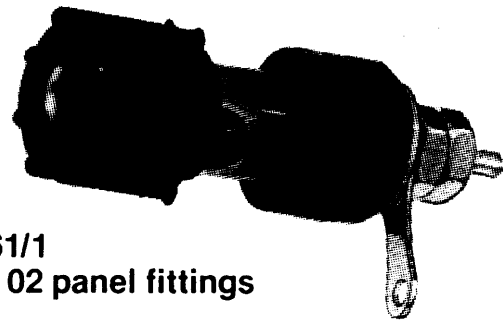

L1361/1
with 02 panel fittings

obviates the need for wire stripping and it will accommodate even a single 40 s.w.g. (0.122 mm) conductor without fracturing it. The head is captive.

Current rating: ___ 10 A

Temperature

range: ___ -25 °C to + 70 °C

Materials: ___ Head, polypropylene
Stem, brass, nickel
plated. Solder post
tin-dipped

Colour: ___ Black

Weight: ___ 11,8 g average

**Leakage, when
used with 02**

panel kit: ___ ≤ 1 cc/h @ 20 lbf/in²
138 kPa

Humidity: ___ H1

Wire size


(maximum): ___ 4 mm diameter

Ordering reference:

L1361/1

02 panel fittings

(Terminals and fittings are supplied unassembled and must be ordered as individual items.)

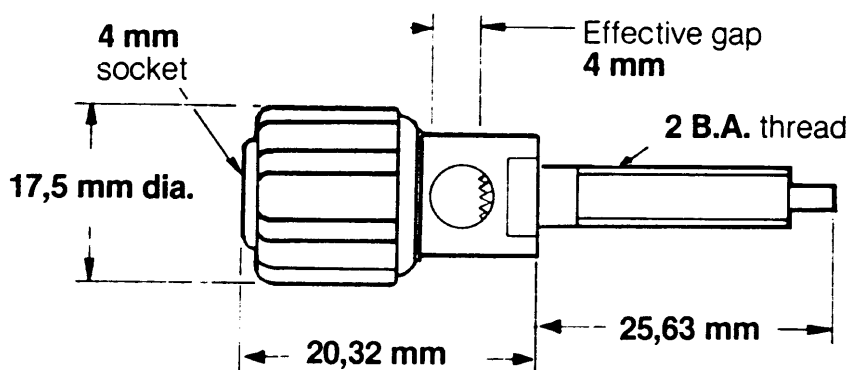

02 panel fittings

Comprises: ___ 2 phenolic resin
mouldings. 2 sealing
rings. Metal washer
solder tag. 2 locknuts

**Breakdown
voltage:** ___ >2 kVd.c.

**Insulation
resistance:** ___ ≥ 500 megohms

Panel thickness: 5,6 mm maximum

Temperature

range: ___ -40 °C to + 70 °C

Fixing torque: ___ 1,41 Nm

Clamping torque: 1,13 Nm

