


What's in the Box



Anker SOLIX C300 Portable Power Station




AC Charging Cable



Important Safety Instructions

Overview

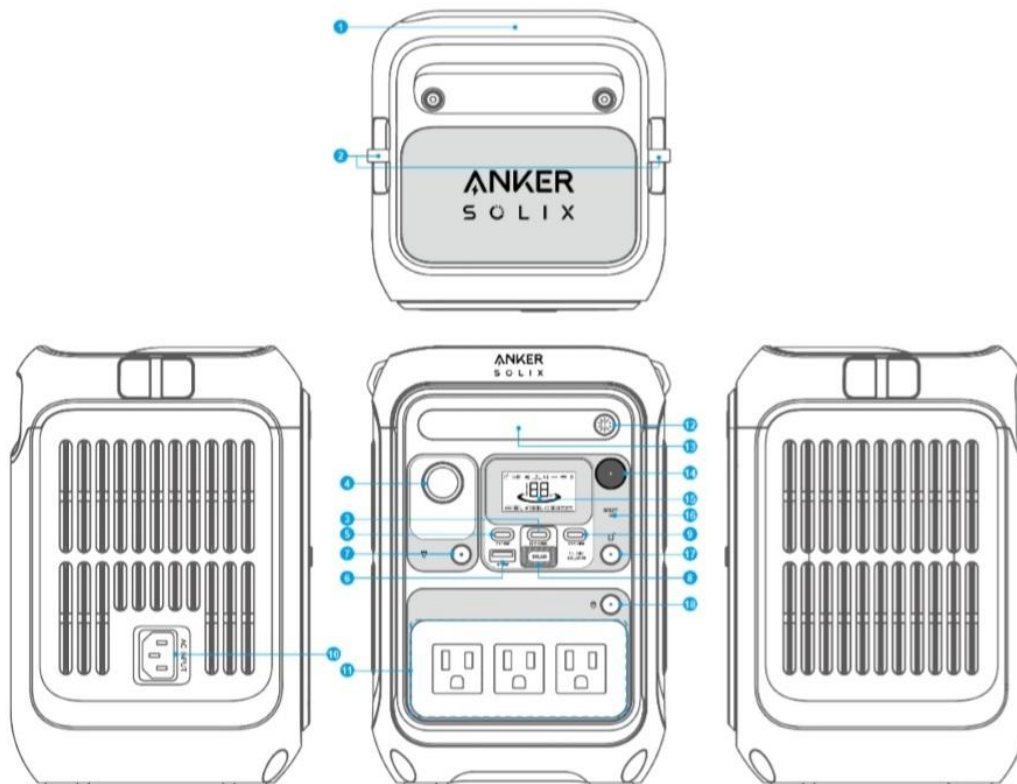

- ❶ Handle
- ❷ Strap Attachment*
- ❸ 140W USB-C Input/Output Port
 - [⚡] indicates a bidirectional interface.
- ❹ Car Socket
- ❺ 15W USB-C Output Port
- ❻ 12W USB-A Output Port
- ❼ Car Socket On/Off Button
- ❽ Solar Input and Car Input
 - The sliding cover design is intended to prevent this port and the 140W USB-C Input/Output Port from being used simultaneously.
- ❾ 140W USB-C Output Port
- ❿ AC Input Port
- ⓫ AC Output Ports
- ⓬ Ambient Light On/Off Button
- ⓭ Ambient Light
- ⓮ Main Power Button
- ⓯ LCD Screen
- ⓰ Reset
- ⓱ IoT Button
- ⓲ AC Output On/Off Button

Specifications

Cell Capacity	288Wh
AC Input Voltage	120V~3.5A Max, 60Hz
AC Input Power (Charging)	330W Max
AC Input Power (Bypass Mode)	380W Max
Solar Panel Input	11~28V~8.2A (100W Max)
USB-C2 Input	9V~3A / 15V~3A / 20V~5A / 28V~5A (140W Max)
Car Charger Output	12V~10A
AC Output (Inverter Mode)	120V~ 2.5A, 60Hz, 300W Max
AC Output (Bypass Mode)	120V~ 2.5A Max, 60Hz, 300W Max
USB-A Output	5V~2.4A (12W)
USB-C1 Output	5V~3A (15W)
USB-C2 Output	5V~3A / 9V~3A / 15V~3A / 20V~5A / 28V~5A (140W Max)
USB-C3 Output	5V~3A / 9V~3A / 15V~3A / 20V~5A / 28V~5A (140W Max)
USB-A and USB-C1 Total Output	5V~4A (20W Max)
Total Output	360W
UPS	<10ms
Discharging Temperature	-20°C~40°C / -4°F~104°F
Charging Temperature	0°C~40°C / 32°F~104°F
Size	16.4*16.1*24.0 cm / 6.5*6.3*9.5 in
Net Weight	4.13 kg / 9.1 lb